




# AQUAPRO INDUSTRIAL CO., LTD.

HEAD OFFICE: 7F, NO.202, SEC. 5, NAN-KING E. RD., TAIPEI, TAIWAN, R.O.C.

TEL:886-2-2767-3018 / FAX:886-2-2766-3197

E-mail:[aquapro.taiwan@hibox.hinet.net](mailto:aquapro.taiwan@hibox.hinet.net)

## APC CARBON BLOCK CARTRIDGE SPEC.

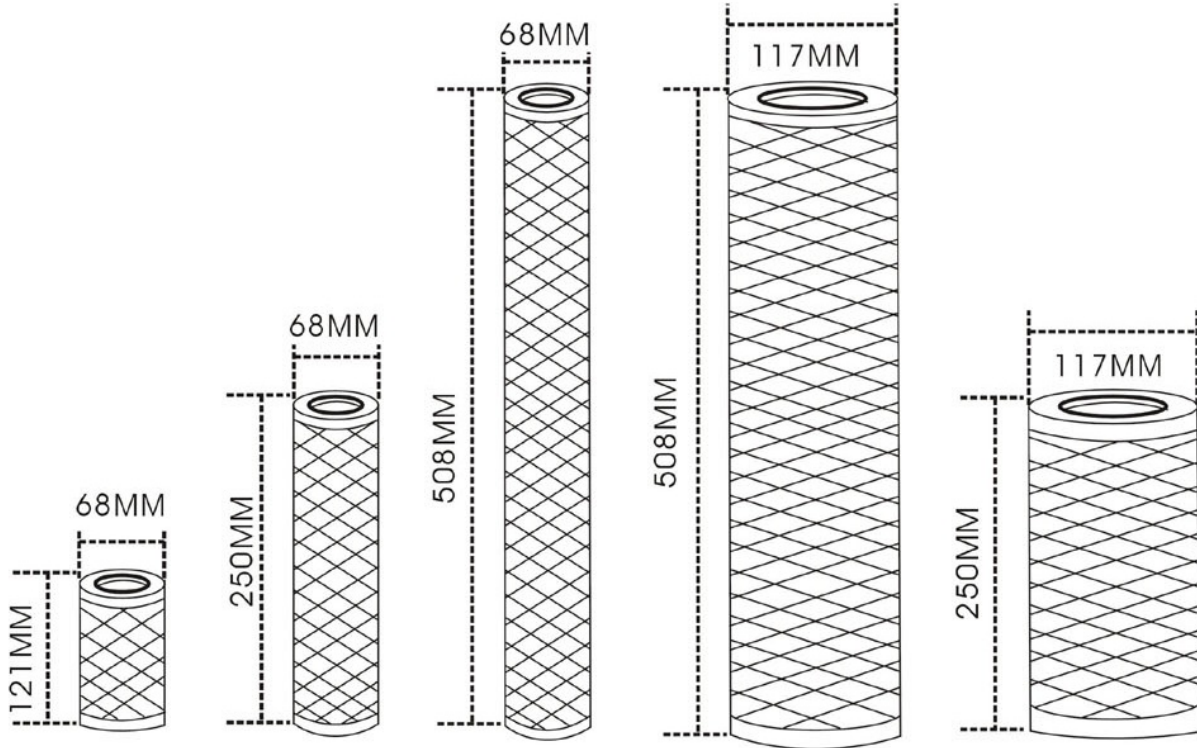

PART NUMBER	O.D. x Length	CHLORINE CAPACITY	NOMINAL $\mu\text{m}$ RATING	INITIAL $\Delta\text{P}$ @ FLOW
APC-5	68MM x121MM	>1500gal @1.0GPM	5 $\mu\text{m}$	2.0psi @0.5 GPM
APC-10	68MM x250MM	>3000gal @1.0GPM	1, 5, 10 $\mu\text{m}$	2.0psi @ 1.0GPM
APC-20	68MM x502MM	>7000gal @2.0GPM	5 $\mu\text{m}$	2.0psi @ 2.0GPM
APC-1045	117MM x243MM	>10000gal @3.0GPM	5 $\mu\text{m}$	4.0psi @ 3.0GPM
APC-2045	117MM x500MM	>20000gal @7.0GPM	5 $\mu\text{m}$	5.5psi @5.0GPM

Media	Bond G.A.C.
End caps	Polypropylene
Inner/Outer Wraps	Polypropylene Non-woven
Netting	Polypropylene
Gaskets	Buna-N

Max. Operating Temperature	125°F
Max. Operating Pressure	17.5Kg/cm <sup>2</sup>
Max. Differential Pressure	7Kg/cm <sup>2</sup>
Collapse Pressure	14Kg/cm <sup>2</sup>