



FILTRATION SYSTEM

-- AQF-10-12C -- 1 STAGE AQF10" FILTRATION SYSTEM

- ONE STAGE PP10
- IN/OUTLET: 3/4"
- FLOW RATE: 40GPM
- MAX PRESSURE: 125PSI
- MAX TEMPRESURE: 120 F (50 C)

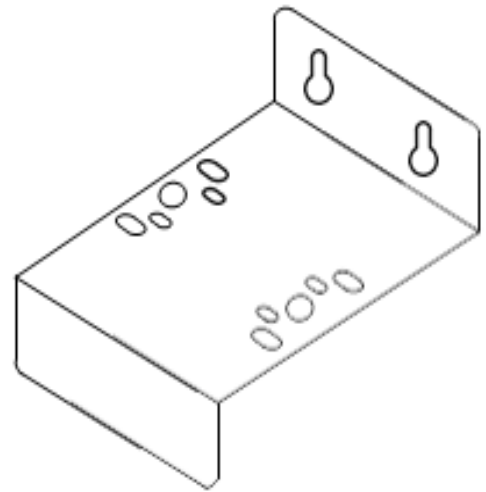

BRACKET

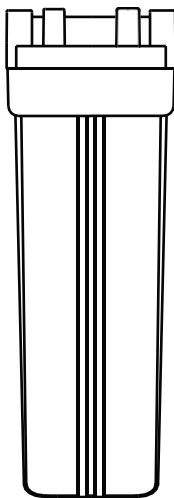

PPS-10

NSF SEDIMENT
CARTRIDGE



**SOURCE
WATER**

Spun Polypropylene Sediment Filter Cartridges



PART CODE	O.D	LENGTH	SERVICE LIFE	MEDIA
PP10	2.5"	10"	2 – 3 Months	Polypropylene

Materials	100% Polypropylene
-----------	--------------------

Performance	<p>Operating Pressure and temperature:</p> <p>The pleated cartridge construction will withstand differential Pressures up to 60 PSI(4Bar) at ambient temperature The optimum changeout differential pressure is 35psi(2.5Bar) up to 60°C</p> <p>Service condition:</p> <p>500KPa(5Bar) by 20°C 300KPa(3Bar) by 65°C</p>
Features	<ul style="list-style-type: none">• Multi-layers graded density• Excellent chemical resistance• Low cost• High dirt holding capacity• Wide range of micron ratings• Wide range of sizes
Micron Rating	<ul style="list-style-type: none">• 1• 5• 10• 25• 50